



Experimental modules assembled on a metal casing with press-to-lock buttons for insertion in work frames. Unit symbols and standardized mimic diagram are displayed on the front panel and the connections are made via sockets meeting safety standards.

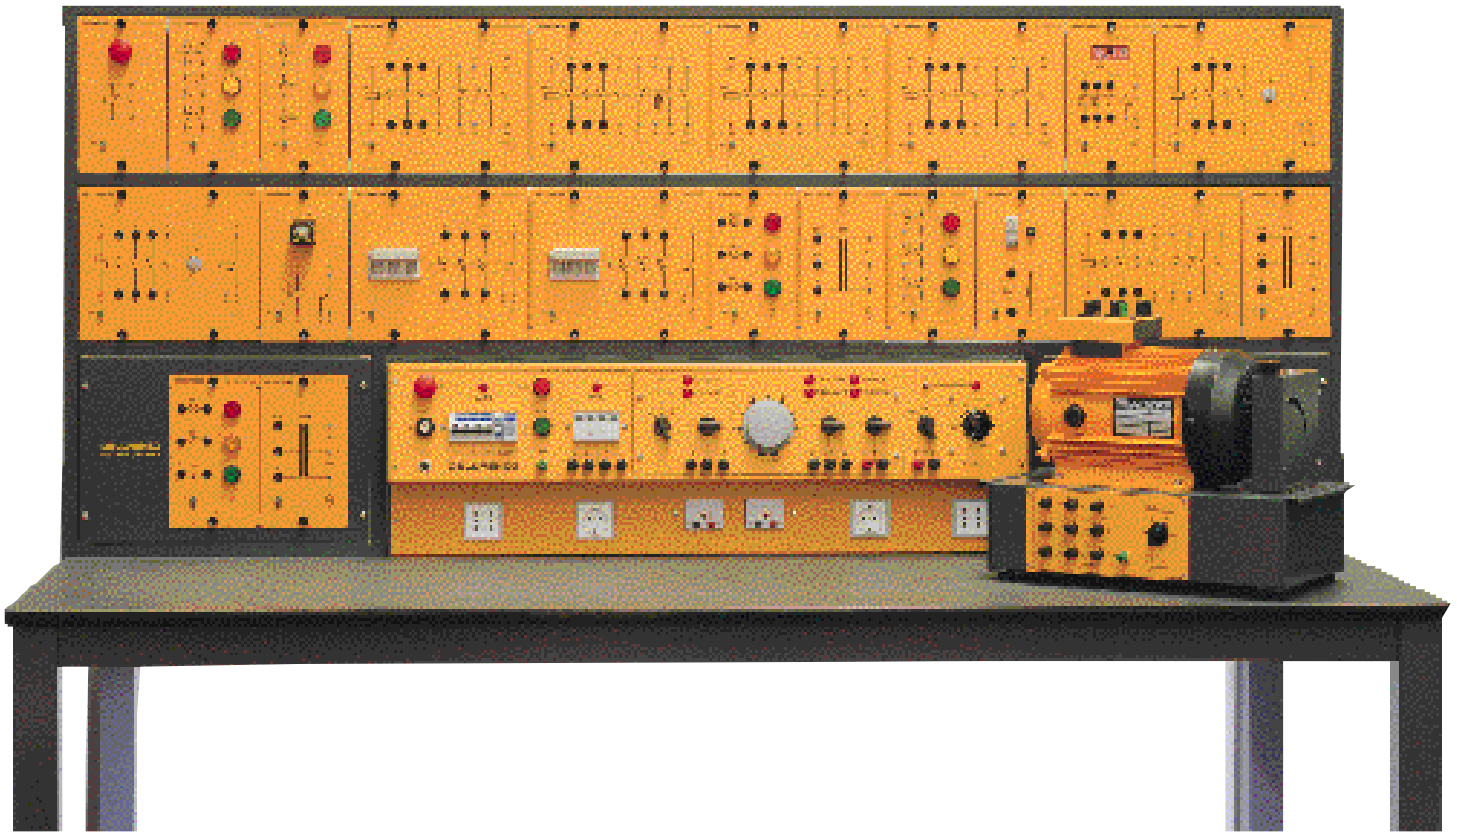

**DL 2102AL**

**THREE-PHASE POWER SUPPLY**

Supplied from a cable trunk for three-phase mains connection.  
 Earth-leakage automatic circuit breaker with physiologic threshold and indicator lamp.  
 Socket with shrouded contacts according to UL Standards and key operated switch for applying voltage.  
 One single-phase universal socket outlet.

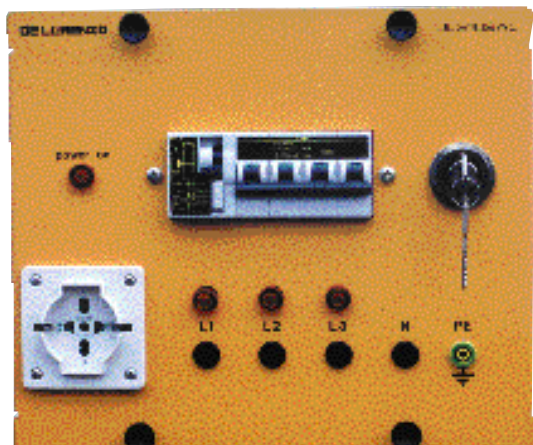

**DL 2102T01**

**MUSHROOM BUTTON**

For the manual control of electrical circuits in direct and/or alternate current in case of emergency.  
 Emergency red pushbutton, with 1 N/O and 1 N/C contacts.  
 Contact rating 660 Vac, 10 A.

